

3-AXIS NETWORK KEYBOARD CONTROLLER

TC-5820B/5880



MODEL

TC-5820B: PTZ, DVR, Matrix switcher keyboard controller

FEATURES


- Keyboard to Control: High Speed Dome, Network High Speed Dome, Standalone DVR, Central Management Platform
- 3-Axis joystick for PTZ control
- Password protection, support multiple user authority
- High Resolution LCD
- RS232, RS485 & Network Connections
- Preset Position, Auto Scan, Auto Pan, Auto Tour & Pattern Control

SPECIFICATIONS

Protocol	Pelco-P, Pelco-D
Baud	2400bps, 4800bps, 9600bps, 19200bps
Keyboard Communication	RS485, RS232, RJ45, USB
Transmission Distance	1200m
Maximum cable length	1200m
Power Supply	DC 12V
Power Consumption	5W
Dimension	345mmx175mmx98mm
Working Temperature	-10%~+50%
Working Humidity	10%~90%
Unit Weight	3KG
Shipping Weight	5KG

DIMENSION

Unit: mm

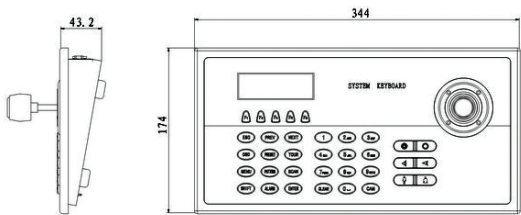

MODEL

TC-5880: PTZ, DVR, Matrix switcher keyboard controller

FEATURES

- Keyboard to Control: High Speed Dome, Network High Speed Dome, Standalone DVR, Central Management Platform
- 3-Axis joystick for PTZ control
- Password protection, support multiple user authority
- High Resolution Large LCD, Operate pattern tour, crusing track and presets by OSD menu
- RS485 & Network Connections
- Preset Position, Auto Scan, Auto Pan, Auto Tour & Pattern Control

SPECIFICATIONS

Protocol	Pelco-P, Pelco-D
Baud	2400bps, 4800bps, 9600bps, 19200bps
Keyboard Communication	RS485, RS232, RJ45, USB
Transmission Distance	1200m
Maximum cable length	1200m
Power Supply	DC 12V
Power Consumption	5W
Dimension	440mmx240mmx100mm
Working Temperature	-10%~+50%
Working Humidity	10%~90%
Unit Weight	4KG
Shipping Weight	6KG

DIMENSION

Unit: mm

