



TC-C34QN Spec: I5W/E/4mm/VJO

# 4MP Fixed Starlight IR Bullet Camera

LITE Series



## KEY FEATURES

- Metal+Plastic Housing
- Up to 2688X1520@25fps
- S+265/H.265/H.264
- Min. illumination Color: 0.02Lux@F1.6
- 2 Warm lights, 15m
- Smart IR, IR Range: 50m
- Operating Conditions -30°~60°, 0~95% RH
- POE, IP67



**Tiandy Technologies Co., Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)  
Website: [en.tiandy.com](http://en.tiandy.com)

Tel: +86-22-58596065  
Fax: +86-22-58596048



## SPECIFICATIONS


Camera	
Image Sensor	1/2.8" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color:0.02Lux@(F1.6,AGC ON),B/W:0Lux with IR
Shutter Time	1s to 1/100,000s
Day & Night	Dual IR Cut Filter with Auto Switch
WDR	TWDR
Angle Adjustment	N/A
Lens	
Lens Type	Fixed
Focal Length	4mm
Lens Mount	M12
Aperture Range	F1.6
Illuminator	
IR LEDs	2
IR Distance	Up to 50m
Wavelength	850nm
White LEDs	2
Compression Standard	
Video Compression	S+ 265/H.265/H.264B/H.264M/H.264H
Video Bit Rate	32kpbs~6Mpbs
Audio Compression	G.711A/G.711U/ADPCM_D
Audio Sampling Rate	8kHz/32kHz/48kHz
Image	
Max. Resolution	2688X1520
Main Stream	PAL:25fps(2688X1520,2560x1440,2304x1296,1920x1080,1280x720)
	NTSC:24fps(2688X1520,2560x1440); 30fps(2304x1296,1920x1080,1280x720)
Sub Stream	PAL:25fps(704x576,704x288,352x288,640x360)
	NTSC:30fps(704x480,704x240,352x240,640x360)
Third Stream	N/A
	N/A
Image Setting	Saturation,brightness,contrast,sharpness,adjustable by client software or web browser
Image Enhancement	BLC/3D DNR/HLC/AGC
ROI	Yes,8 regions
OSD	16*16/32*32/48*48,/64*64,adaptable size,Letters Such as Week,Date,Time,Total 1 Regions
Picture Overlay	N/A
Privacy Mask	Yes,4 regions
Defog	Yes

# Tiandy

Feature	
Alarm Trigger	Motion Detection,IP Address Conflict
Video Analytics	Tripwire,Perimeter
Network	
ANR	N/A
Protocols	HTTP,HTTPS,TCP/IP,UDP,UPnP,ICMP,DHCP,DNS,Easy DDNS,NTP,QoS,IPv4
System Compatibility	CGI,MILSTONE
Remote Connection	2
Client	Easy7,EasyLive
Web	IE,Firefox,Edge,Safari,Chrome
Interface	
Communication Interface	1 RJ45 10M/ 100M self adaptive Ethernet port
Audio I/O	N/A
Alarm I/O	N/A
Built-In Speaker	N/A
Reset Button	N/A
On-board storage	N/A
General	
Web Client Language	18 languages Simplified Chinese/English/Traditional Chinese/Spanish/Italian/Korean/Turkish/Russian/Thai/ Polish/French/Dutch/Hebrew/Vietnamese/Arabic/German/Ukrainian/Portuguese
Operating Conditions	-30°C~60°C,0~95%RH
Power Supply	DC12±25%,POE,802.3af
Protection	IP67
Boundary Dimensions	161x68x66mm
Package Dimensions	175x85x85mm

\* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.

## DIMENSIONS (Unit: mm)

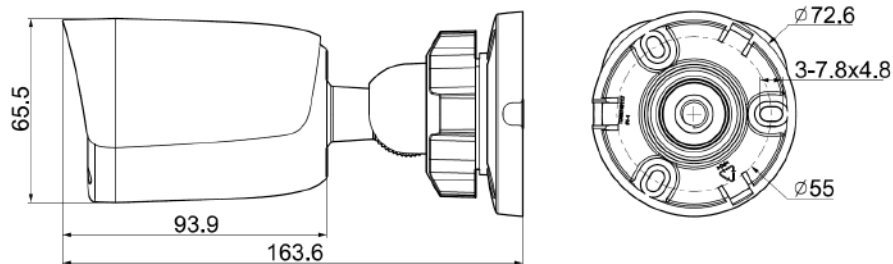

DISTRIBUTED BY



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)  
Website: [en.tiandy.com](http://en.tiandy.com)

Tel: +86-22-58596065  
Fax: +86-22-58596048