



TC-C34QN Spec:I3/E/4mm/VJ05.0

4MP Fixed IR Bullet Camera

Spark Series



KEY FEATURES

? W\$4b^Sef[UZage[Y
Gb fa ? Sj ž\$' (" ° #&&" dWēa'gf[a`
Et\$(' !: ž\$(' !: ž\$(&4!: ž\$(&? !: ž\$(&
5a'ad" ž' \$>gj 2/8#ž(†395 A@†4!† , " >gj i [fZ ;D
E_ Sdf ;Di;D dS` YW%` _

Egbbad f e_ Sdf egdhW`S` UW
AbWsf[Y Ua` V[f[a` e ž` p(" †: g_ [V[fk + ' . ad Vēē
^ a Ua` VW eSf[a` fi
BA 7 * " \$ž\$X? Sj ž(†
;B()



Tiandy Technologies Co.,Ltd



Tiandy Overseas



Tiandy



@tiandyofficial

Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com

Tel: +86-22-58596065

Website: en.tiandy.com


Fax: +86-22-58596048

SPECIFICATIONS

Camera	
Image Sensor	1/3"CMOS
Min. Illumination	Color:0.02Lux@(F1.6,AGC ON),B/W:0Lux with IR
Shutter Time	1s~1/100000s
Day&Night	IR-cut filter with auto switch (ICR)
WDR	DWDR
S/N	>40dB
Angle Adjustment	0~360°(P); 0~80°(T); 0~360°(R)
Lens	
Lens Type	Fixed focal lens
Focal Length	4mm
Lens Mount	M12
Aperture Range	F1.6
Field of View	78.3°(H); 44.1°(V); 89.3°(D)
DORI Distance	Detect:80.0m Observe:31.8m Recognize:16.0m Identify:8.0m
Illuminator	
IR LEDs	2
IR Distance	30m
Wavelength	850nm
Compression Standard	
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Video Bit Rate	32k~6Mbps
Audio Compression	G.711A/G.711U
Audio Sampling Rate	8kHz
Image	
Main Stream	PAL:20fps(2560×1440, 2304×1296, 1920×1080, 1280×720) NTSC:20fps(2560×1440, 2304×1296, 1920×1080, 1280×720)
Sub Stream	PAL:20fps(704×576, 704×288, 352×288, 640×360) NTSC:20fps(704×480, 704×240, 352×240, 640×360)
BLC	Yes
HLC	Yes
AGC	Yes
3D DNR	Yes
White Balance	Auto/Semi-Auto/Manual/Sunshine/Nature Light/Warmlight Lamp/Daylight Lamp/Filament Lamp/Lock White Balance
OSD	Overlay of additional characters in 1 regions, 1 line, with a maximum of 48 characters or 16 Chinese characters per region; 16*16/32*32/48*48/64*64
Privacy Mask	4 black static areas
Defog	Yes

Feature	
Alarm Trigger	Motion Detection; IP Address Conflict
Linkage Method	trigger capture
Network	
Protocols	HTTP; TCP/IP; UDP; ICMP; DHCP; DNS; NTP; IPv4; Telnet; Unicast
System Compatibility	ONVIF Profile S/T; CGI; Milestone
Remote Connection	≤2
Client	Easy7 Smart Client
Moblle Client	EasyLive Plus
Interface	
Communication Interface	1*RJ-45,10/100 Mbps self-adaptive Ethernet port
General	
Web Client Language	12 languages English/Spanish/Italian/Turkish/Russian/Thai/French/Polish/Arabic/Vietnamese/Portuguese/ Japanese
Operating Temperature	-30℃~60℃(No turning on the light)
Operating Humidity	Humidity 95% or less (no condensation)
Storage Temperature	-30℃~60℃
Storage Humidity	Humidity 95% or less (no condensation)
Power Supply	POE 802.3af,MAX 6W
Protection	Surge4000V; ESD6000V; IP67
Boundary Dimensions	164(L)73(W)73(H)mm
Package Dimensions	180(L)90(W)95(H)mm
GrossWeight	0.3kg

DIMENSIONS (Unit: mm)

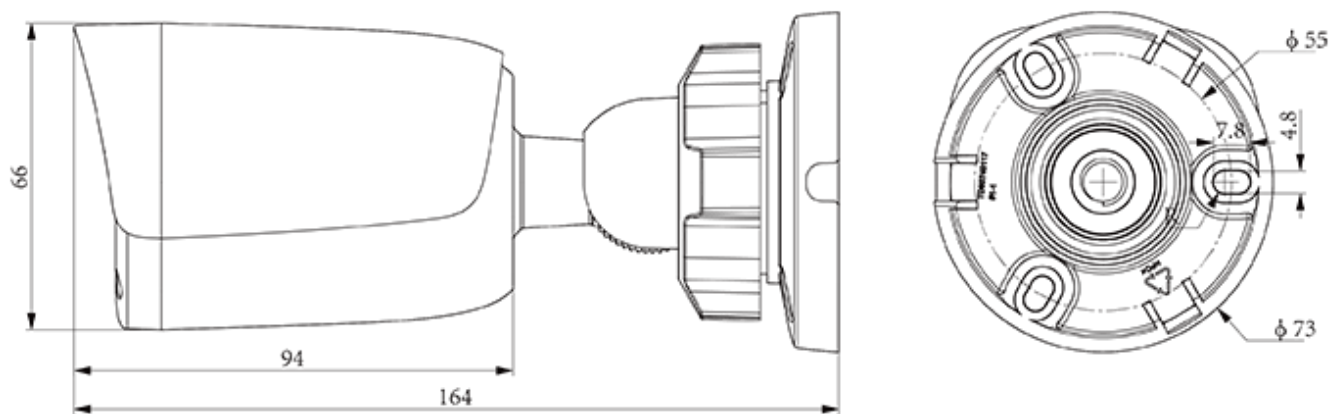

Assembly diagram of Junction Box



TC-P54BM Spec:V5



A36