




TC-P3601 Spec:I/N

Indoor Monitor

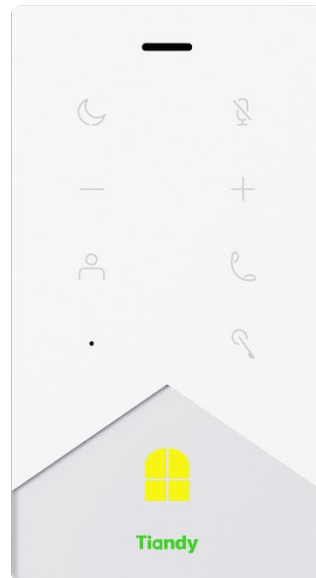

KEY FEATURES

- Elegant Design
- Fade-resistant keys
- Fully functional
- Surface mountable
- Optional Wi-Fi

SPECIFICATIONS

Physical	
System	Linux
Front Panel	Plastic
Power Supply	PoE (802.3af) or DC 12V/2A
Standby Power	1.5 W
Rated Power	6 W
Wi-Fi	IEEE802.11 b/g/n,@2.4GHz(Optional)
Ethernet Port	1 x RJ45, 10/100 Mbps adaptive

RS485	1
Power Output	1 (12V/100mA)
Doorbell Input	8 (use any alarm input port)
Alarm Input	8
Installation	Surface Mounting
Dimension	184 x 100 x 28 mm
Working Temperature	-10°C to +55°C
Storage Temperature	-40°C to +70°C
Working Humidity	10% to 90% (non-condensing)
Audio	
Audio Codec	G.711
Echo Cancellation	Yes
DTMF	RFC2833
Microphone	Built-in microphone
Speaker	8Ω / 1W
Networking	
Protocol	SIP, UDP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP



Tiandy Technologies Co.,Ltd



Tiandy Overseas



Tiandy



@tiandyofficial

Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com

Tel: +86-22-58596065

Website: en.tiandy.com

Fax: +86-22-58596048