




TC-P3701 Spec:Z

Barrier gate

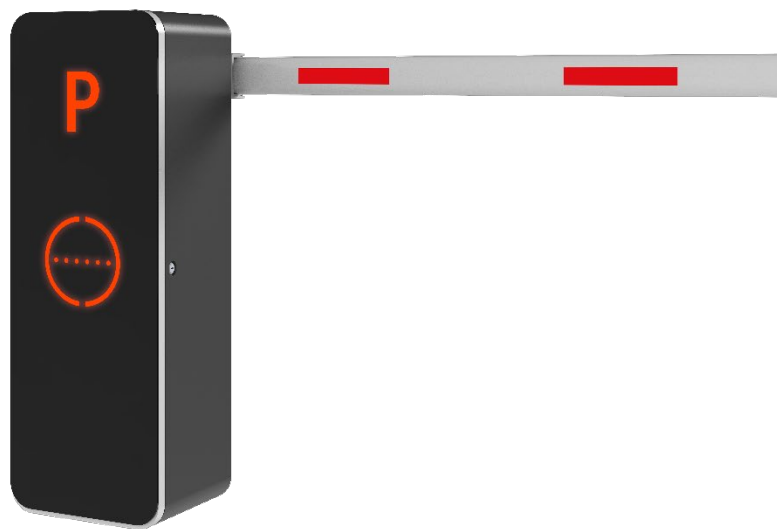

KEY FEATURES

- Barrier gates adopts ZKTeco's interactive LED chassis design, programmable control panel, high-efficiency Brushless DC motor, and material gear transmission structure.
- It has the advantages of fast speed, stable quality, rich function expansion, and so on.
- It is a much comprehensive barrier gate.

SPECIFICATIONS

Basic Specification	
Operating Speed	2.5s
Boom Arm Length	4.5m
Boom Arm Type	Straight boom with LED
Chassis Dimensions (W*L*H)	350*300*1020 (mm)
Motor Type	DC 24V brushless motor
Motor MCBF	3 million times

Output Power	120W
Rated Current	6A
Power Supply	AC 220V, 50Hz / AC 110V, 60Hz
Remote Control Distance	≤30m
Operating Temperature	-35°C to 70°C
Operating Humidity	<90%
Chassis Weight	45kg



Tiandy Technologies Co.,Ltd



Tiandy Overseas



Tiandy



@tiandyofficial

Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com

Website: en.tiandy.com

Tel: +86-22-58596065

Fax: +86-22-58596048