



TC-C38TSP Spec: I8/A/E/Y/M/H/2.7-13.5mm/V5.0

## 8MP Starlight Motorized IR Bullet Camera

Pro Series



### KEY FEATURES

- Full Metal Housing
- Motorized Lens 2.7-13.5mm
- Up to 3840×2160@30fps
- Multi port support for Fiber Optic, Copper and APN connection
- S+265/H.265/H.264/M-JPEG
- Min. illumination Color: 0.003Lux@F1.6 • Smart IR, IR Range: 80m
- Support Video Analytics
- Support Human/Vehicle Classification
- Audio I/O 1/1, alarm I/O 2/1
- Support End To End Encryption (Custom Private Key)
- Plugin Free
- Flexible Integration With Centralized Solution
- Operating Conditions -35°C~65°C, 0~95% RH • POE, IP67



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)  
Website: [en.tiandy.com](http://en.tiandy.com)

Tel: +86-22-58596178  
Fax: +86-22-58596048



## SPECIFICATIONS

Camera	
Image Sensor	1/2.8" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color: 0.003Lux@ (F1.6, AGC ON), B/W: 0Lux with IR
Shutter Time	1s to 1/100,000s
Day & Night	Dual IR Cut Filter with Auto Switch
Wide Dynamic Range	120dB
Angle Adjustment	Bracket, pan 0~360°, tilt 0~75°, rotate 0~360°
Lens	
Lens Type	Motorized
Focus	2.7-13.5mm
Lens Mount	Φ14
Aperture	F1.6
FOV	Horizontal field of view: 102.7°~29°
Illuminator	
IR LEDs	4
IR Range	Up to 80m
Wavelength	850nm
White/Warmlight LEDs	N/A
Compression Standard	
Video Compression	S+265/H.265/H.264/M-JPEG
Video Bit Rate	32Kbps~16Mbps
Audio Compression	G.711A/G.711U/ADPCM/AAC
Audio Bit Rate	8K~48Kbps
Image	
Max. Resolution	3840×2160
Main Stream	PAL: 25fps (3840×2160, 3072×2048), 50fps (1920×1080, 1280×720) NTSC: 30fps (3840×2160, 3072×2048), 60fps (1920×1080, 1280×720)
Sub Stream	PAL: 25fps (704×576, 704×288, 640×480, 352×288) NTSC: 30fps (704×480, 704×240, 640×480, 352×240)
Third Stream	PAL: 25fps(1280×720, 704×576, 704×288, 640×360, 352×288) NTSC: 30fps(1280×720, 704×480, 704×240, 640×360, 352×240)
Image Setting	Saturation, brightness, contrast, sharpness, adjustable by client software or web browser
Image Enhancement	BLC/3D DNR/HLC/Corridor Format
ROI	Support 8 fixed regions of coding
OSD	16×16, 24×24, 32×32, 48×48, 64×64, 96×96, adaptable size, Letters Such as Week, Date, Time, Total 8 Regions
Picture Overlay	Yes
Privacy Mask	Yes, 4 regions
Smart Defog	Yes
Feature	
Alarm Trigger	Event Input, Event Output, Motion Detection, Mask Alarm, Disk Full, Disk R/W Error, IP Address Conflict, MAC Address Conflict, FTP Server Exception
Video Analytics	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowded, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Heatmap, Safety Helmet Detection, Human/Vehicle Classification
Defog	Yes






Network	
ANR	Yes(Only Support Tiandy ANR NVR)
Protocols	IPv4,IPv6,IGMP,ICMP,ARP,TCP,UDP,DHCP,PPPoE,RTP,RTSP,RTCP,DNS,DDNS,NTP,FTP,UPnP,HT TP, HTTPS,SSH(Encryption with custom private key),SMTP,802.1x,SNMP,SSL,QoS,Telnet,RTMP,Multicast
System Compatibility	ONVIF (PROFILE S/T/G), SDK, Milestone, CGI, P2P
Remote Connection	≤ 2
Client	Easy7, EasyLive
Web Version	Web6
Interface	
Communication Interface	1 RJ45 10M/100M self adaptive Ethernet port, 1 Fiber Optic, 1 SIM, RS 485
Audio	1/1
Alarm	2/1
Reset Button	Yes
On-board storage	Built-in Micro SD card slot, up to 512 GB
General	
Firmware Version	-
Web Client Language	17 languages English, Russian, Spanish, Korean, Italian, Turkish, Simple Chinese, Traditional Chinese, Thai, French, Polish, Dutch, Hebraism, Arabic, Vietnamese, Ukrainian, German
Operating Conditions	-35°C ~ 65°C, 0 ~ 95% RH
Power Supply	AC 100-240 V/POE+(IEEE802.3 at)/PoE
Power Consumption	MAX: 8.5W (12V) MAX: 10W (PoE)
Protection	IP67, IK10 Lightning protection, surge protection and voltage transient protection
Heater	N/A
Dimensions	264.3×95×83.2mm (10.41×3.74×3.28inch)
Weight	1.15kg (2.54lb)

\* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.

## AVAILABLE MODEL

## TC-C38TS SPEC: I8/A/E/Y/M/H/2.7-13.5MM/V4.0

## DIMENSIONS (Unit: mm)

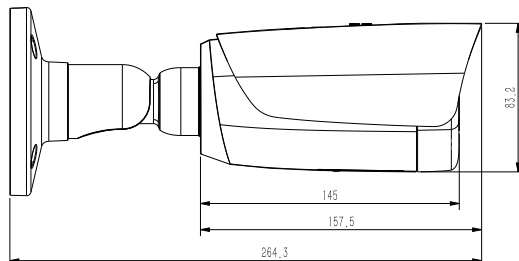

## ACCESSORIES



A36  
Pole Mount



A35  
Corner Mount



TC-P54AM Spec: V4  
Junction Box



A22  
Junction Box

DISTRIBUTED BY



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)  
Website: [en.tiandy.com](http://en.tiandy.com)

Tel: +86-22-58596065  
Fax: +86-22-58596048